

FEATURES OF BATTERY

- Function : Bluetooth + BMS Protection+Alarm system(optional)+IP65
- High Power : It can support 150A continuous discharge, 300A(30s)
- Warranty: Provide 5 years Warranty.
- Custom: Print logo and customized colors
- Certificates: MSDS,UN38.3 and CE
- Available models : 36V/ 48V/ 64 / 72V/ 105Ah 150Ah 180Ah 210Ah.....
- Warehouse: Fast delivery within 7 days





SPECS OF BATTERY AND BMS

ELECTRICAL SPECIFICATIONS		MECHANICAL SPECIFICATIONS	
Nominal Voltage	64V	Terminal Type	2*M8 Bolts
Nominal Capacity	105Ah	Weight	60 KG
Nominal Energy	6.72 kWh	Case Dimension(L*W*H)	520×340×270(mm)±2mm
Combination type	20S1P	Shipment of products with electricity	50%-70% Current delivery
Charging voltage	73V	Cell type / Chemistry	LiFePO4 EVE Grade A cell
Rated capacity	105Ah	LCD or Bluetooth Function	Both available
Internal resistance	≤60mΩ	Package material	Carton box or pallet
Maximum In Parallel	Optional	BMS:low voltage,high voltage,over temperature,Over current, short-circuit protection .etc	
Discharge Current and Voltage Specifications		Charge Current and Voltage Specifications	
MAX Continuous Discharge Current	100A	Maximum charge duration current	100A
Peak Current	200A(10S)	Recommended Charge Current	20A
Discharge cutoff voltage	54V	Recommend Charge voltage	73V
Short Circuit Protection	Yes	Balancing Voltage	53V
Safety Specification		COMPLIANCE SPECIFICATIONS	
Short-circuit protection	Yes	Discharge Temperature	-20~+60°C
Low / High Temperature discharging	Yes	Charge Temperature	0 ~+45°C
Low / High Temperature charging	Yes	Storage Temperature Range	-20~+45°C
Over-current discharging	Yes		
Over-current discharging	Yes		
Certificates	IEC62133 UL2580 (Cell) UN38.3,MSDS,CE for pack		

Battery Connection Diagram

				
(01)	(02)	(03)	(04)	(05)

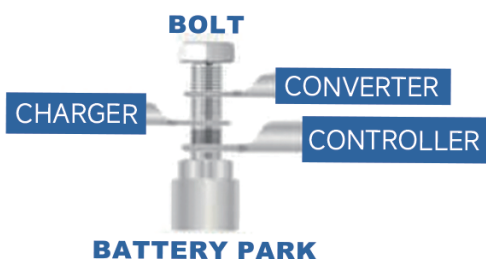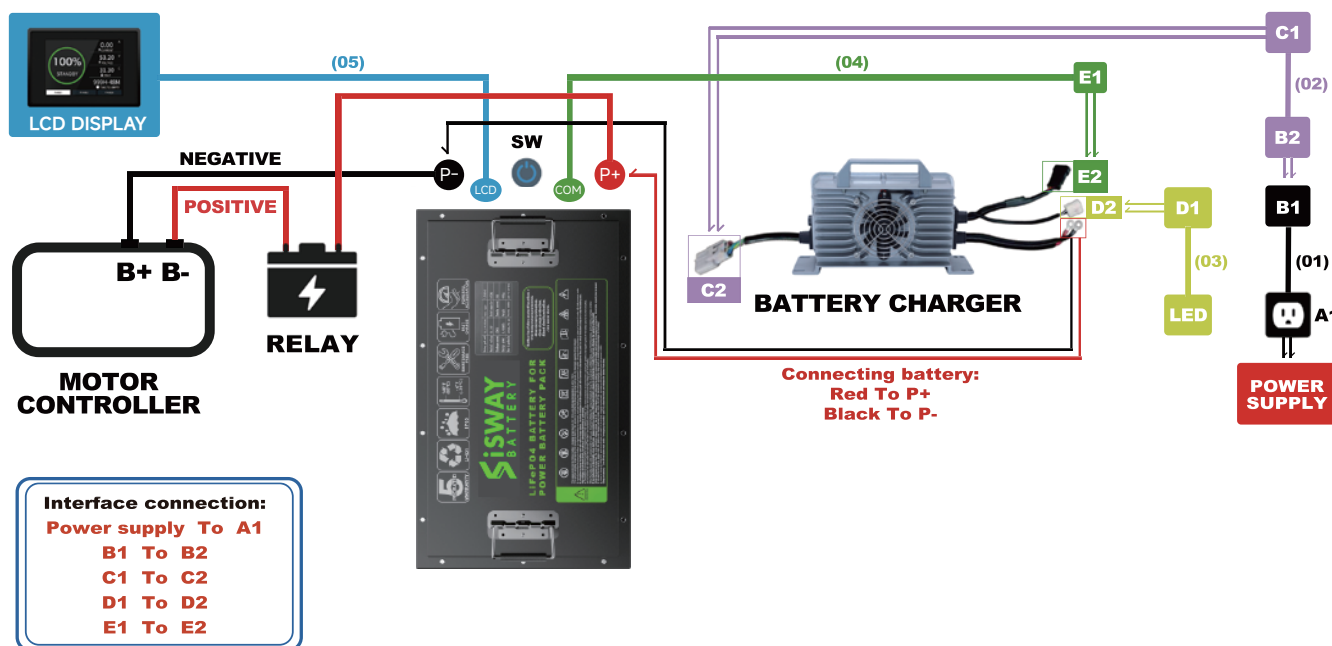

Prior to connecting the metal terminals on the harness with screws, it is necessary to ensure that the corresponding connectors are properly aligned. Once this is done, the screws should be tightened. It is important to note that the larger the cable, the closer to the end of the screws it should be. Conversely, the smaller the cable, the closer to the nut it should be.



01.Battery Pack



02.Communication Cable



03.Display Screen



04.Charger



Charger accessories



05.Charging communication cable



06.M8 screw 07.M6 screw 08.M6 nut