

FEATURES OF BATTERY

- Function : Bluetooth + BMS Protection+Alarm system(optional)+IP65
- High Power : It can support 280A continuous discharge, 400A(30s)
- Warranty: Provide 5 years Warranty.
- Custom: Print logo and customized colors
- Certificates: MSDS,UN38.3 and CE
- Available models : 36V/ 48V/ 72V/ 105Ah 150Ah 180Ah 210Ah.....
- Warehouse: Fast delivery within 7 days





SPECS OF BATTERY AND BMS

ELECTRICAL SPECIFICATIONS		MECHANICAL SPECIFICATIONS	
Nominal Voltage	96V	Terminal Type	2*M8 Bolts
Nominal Capacity	210 Ah	Weight	175kg
Nominal Energy	20.16 kWh	Case Dimension(L*W*H)	A:798(L)x265(W)x290(H)mm B:1160(L)x320(W)x315(H)mm
Combination type	30S2P	Shipment of products withelectricity	50%-70% Current delivery
Charging voltage	109.5V	Cell type / Chemistry	LiFePO4 EVE Grade A cell
Rated capacity	210Ah	LCD or Bluetooth Functio	Both available
Internal resistance	≤60mΩ	Package material	Carton box or pallet
Maximum In Parallel	Optional	BMS:low voltage,high voltage,over temperature,Over current. short-circuit protection .etc	
Discharge Current and Voltage Specifications		Charge Current and Voltage Specifications	
MAX Continuous Discharge Current	200A	Maximum charge durationcurrent	100A
Peak Current	350A (3S)	Recommended Charge Current	30A
Discharge cutoff voltage	82.5V	Recommend Charge voltage	109.5V
Short Circuit Protection	Yes	Balancing Voltage	96V
Safety Specification		COMPLIANCE SPECIFICATIONS	
Short-circuit protection	Yes	Discharge Temperature	-20~+60°C
Low / High Temperature discharging	Yes	Charge Temperature	0 ~+45°C
Low / High Temperature charging	Yes	Storage Temperature Range	-20~+45°C
Over-current discharging	Yes		
Over-current discharging	Yes		
Certificates	IEC62133 UL2580 (Cell) UN38.3,MSDS,CE for pack		



Battery Connection Diagram

				
(01)	(02)	(03)	(04)	(05)

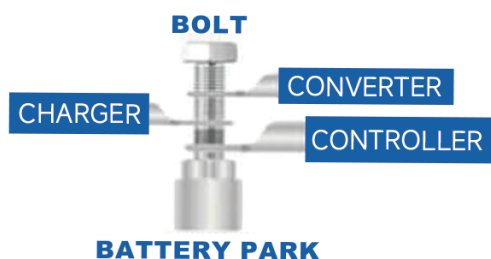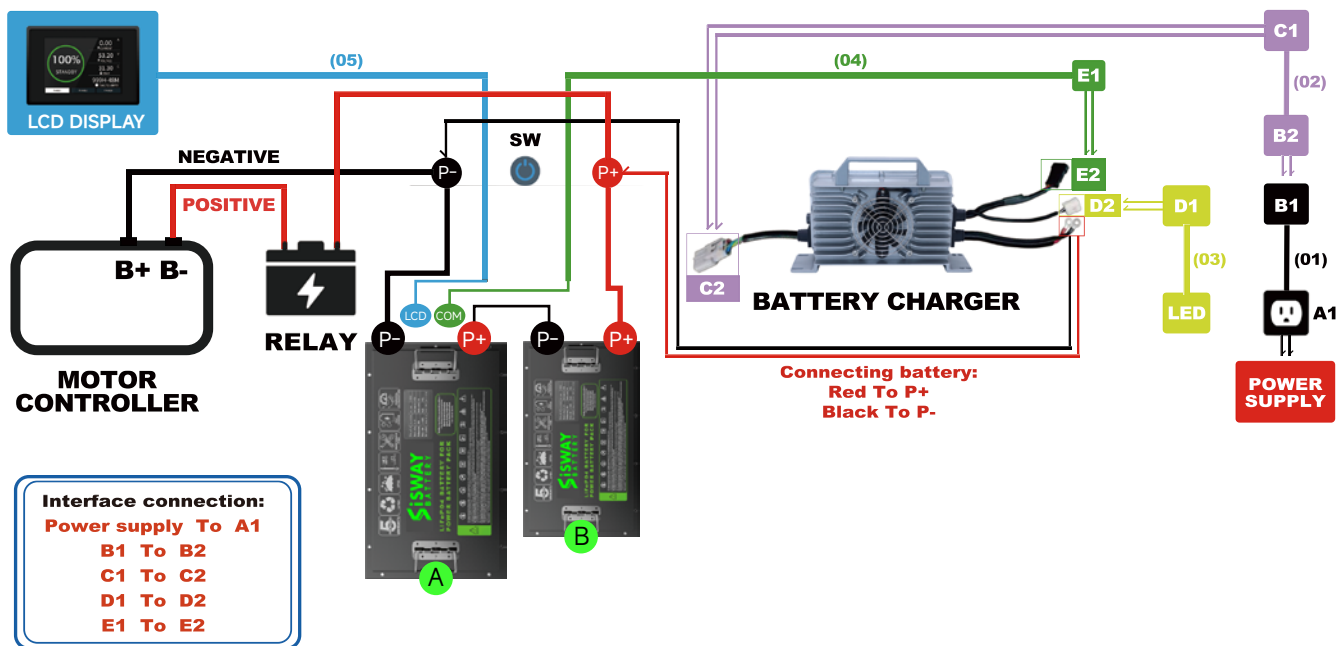

Prior to connecting the metal terminals on the harness with screws, it is necessary to ensure that the corresponding connectors are properly aligned. Once this is done, the screws should be tightened. It is important to note that the larger the cable, the closer to the end of the screws it should be. Conversely, the smaller the cable, the closer to the nut it should be.



01.Battery Pack



02.Communication Cable



03.Display Screen



04.Charger



Charger accessories



05.Charging communication cable

M8x16/SUS*3
M8x30/SUS*4

M6x20/SUS*2
M6x30/SUS*8



06.M8 screw 07.M6 screw 08.M6 nut